




CITYVIEW™ SYSTEMS PERFORMANCE

AUSTRALIAN STANDARDS AS2047  & AS4284  : All of our CityView™ systems have been tested to AS2047 to ensure the ultimate in safety and trust. This test provides data on deflection, operation force, air infiltration, water penetration and ultimate strength. Further AS4284 testing is available for selected products in the CityView™ range.

ACOUSTICS  : Several of our CityView™ systems have been tested for acoustic performance. Visit the Darley Aluminium website to view the full list of the Acoustic Ratings for our CityView™ range.

BUSHFIRE  : A number of our CityView™ systems have been tested to Australian Standards AS1530.8.1 for bushfire ratings up to BAL40. www.darleycityview.com.au

SYDNEY HEAD OFFICE

8 Tyrone Place, Erskine Park NSW 2759
Tel: (02) 8887 2888
Fax: (02) 9834 3244
Email: sales@darleyaluminium.com.au

MELBOURNE

10 Bridge Road, Keysborough VIC 3173
Tel: (03) 9238 3888
Fax: (03) 9768 7288
Email: salesvic@darleyaluminium.com.au

BRISBANE

29 Access Avenue, Yatala QLD 4207
Tel: (07) 3287 1888
Fax: (07) 3287 2088
Email: salesqld@darleyaluminium.com.au


PERTH

36 Armstrong Road, Hope Valley WA 6165
Tel: (08) 9437 2999
Fax: (08) 9437 1024
Email: saleswa@darleyaluminium.com.au

Contact your local fabricator:



AUSTRALIAN
**GLASS &
WINDOW**
ASSOCIATION

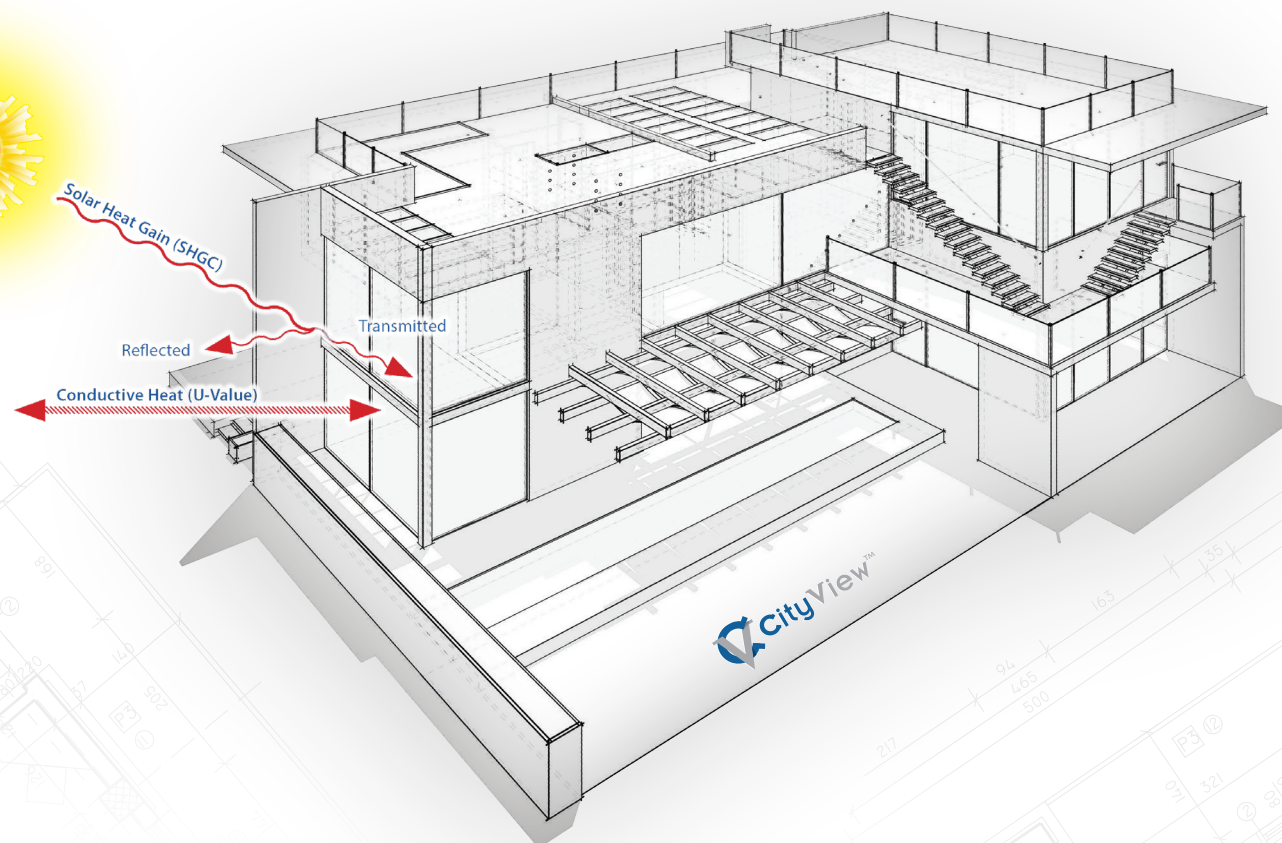

ENERGY EFFICIENCY

WERS: The Window Energy Rating Scheme (WERS) is accredited by the Australian Fenestration Rating Council (AFRC) and is compliant with the National Construction Code (NCC). Reports are prescribed both for the total window performance U-value (U_w) and total window Solar Heat Gain Coefficient (SHGC).

UW: U_w measures heat conductivity, calculating the rate of non-solar heat loss or gain through the total window system (*glass, framing, seals*). The U_w helps indicate how well a window or door rejects heat during summer and retains heat during winter. A lower number indicates better performance.

SHGC: SHGC measures the total window systems ability to block heat transfer through direct sunlight. A lower number indicates better blocking performance; however a high number might be appropriate in cooler climates or with specific building orientations. www.darleycityview.com.au