



# DOUBLE HUNG WINDOW

**For a traditional window** with contemporary design, the CityView™ double hung is a popular choice. This system helps maximise cross-flow ventilation and allows for single or double glazing.

Featuring concealed balance operators, the system will provide years of trouble-free operation.

The CityView™ Double Hung features unique finger grooves for easy operation of the top and bottom sash. Slide in flyscreens are also available with no need for additional clips.

[www.darleycityview.com.au](http://www.darleycityview.com.au)

# Double Hung Window: Technical Specifications



## Design features


Maximum weight per panel	16kg
Maximum height	2,100mm
Maximum width	900mm
Glass thickness	4mm to 20mm
Acoustic performance	Rw 35 with 10.5mm Hush*
U-value	3.3 - 6.4
BAL fire rating	BAL19 Deemed to Satisfy

\* Estimate.

## Options

- Restricted opening for security and above first floor applications
- Slim non-grooved panels available where finger groove not desired

## Double Hung Window: Standard Configurations

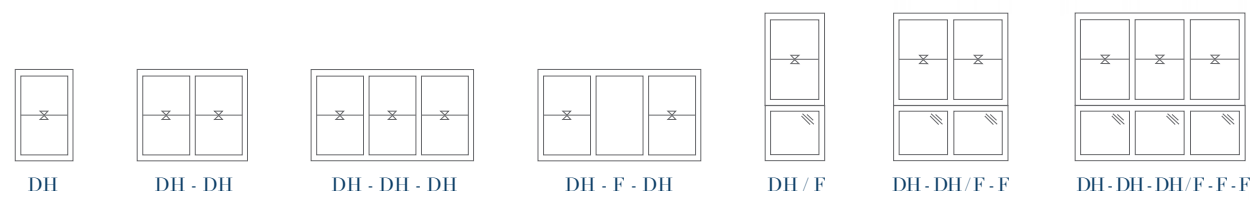

Type	Test Report No.	Water Rating PA	Structural PA	Ultimate PA
Double Hung Window	AZT0491.20	300	1,800	4,500

\*Refer to Technical Manual for further details.

VER.1.2 - 09/22

**SYDNEY HEAD OFFICE**  
 8 Tyrone Place, Erskine Park NSW 2759  
 Tel: (02) 8887 2888  
 Fax: (02) 9834 3244  
 Email: sales@darleyaluminium.com.au

**MELBOURNE**  
 10 Bridge Road, Keysborough VIC 3173  
 Tel: (03) 9238 3888  
 Fax: (03) 9768 7288  
 Email: salesvic@darleyaluminium.com.au

**BRISBANE**  
 29 Access Avenue, Yatala QLD 4207  
 Tel: (07) 3287 1888  
 Fax: (07) 3287 2088  
 Email: salesqld@darleyaluminium.com.au

**PERTH**  
 36 Armstrong Road, Hope Valley WA 6165  
 Tel: (08) 9437 2999  
 Fax: (08) 9437 1024  
 Email: saleswa@darleyaluminium.com.au

Contact your local fabricator:



AUSTRALIAN  
**GLASS & WINDOW**  
 ASSOCIATION